


item number	height (H) (mm)	for height of cable tray / ladder (mm)	thickness of metal sheet (mm)	weight (kg/pc)	amount of bolts for connection (pcs)	
<b>SK 35_S</b>	28	35	0,80	0,06	4	
<b>SK 35_ZM</b>			0,75			
<b>SK 50_S</b>	43	50	0,80	0,09	4	🔥
<b>SK 50_ZM</b>			0,75			🔥
<b>SK 60_S</b>	53	60	0,80	0,10	4	🔥🔥
<b>SK 60_ZM</b>			0,75			🔥🔥
<b>SK 85_S</b>	78	85	1,20	0,24	8	
<b>SK 85_ZM</b>			1,20			
<b>SK 100_S</b>	93	100	1,20	0,32	8	🔥
<b>SK 100_ZM</b>			1,20			🔥
<b>SK 110_S</b>	103	110	1,20	0,35	8	🔥
<b>SK 110_ZM</b>			1,20			🔥

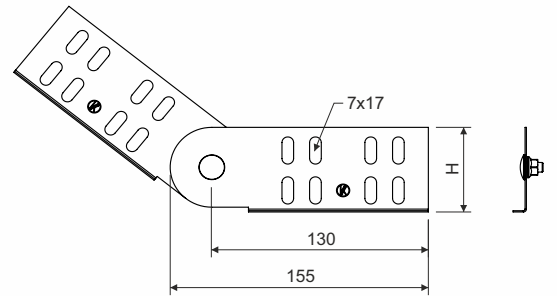

product description:

The hinged joint is used to create bends of any angle in cable trays running through JUPITER cable trays or cable ladders.

The coupling is supplied by 1 piece; must be used 2 pieces for installation. The couplings to be used on the right or left side do not differ.

To fix the connection use the bolt NSM 6X10. To protect the cables, the bolt head is inside the cable tray.

ZM surface finish joins shall be used for ZM or F surface finish trays.

GMT surface finish bolts shall be used for ZM or F surface finish trays.

These items can also be ordered in a varnished version.

surface finish:

S - Pre-Galvanized steel according to ČSN EN 10346, ČSN EN 10143, zinc-layer 15-27 µm

ZM - Pre-Galvanized steel with admixture of magnesium and aluminum according to ČSN EN 10346, ČSN EN 10143, protective layer 18-31 µm (replacement of hot dip galvanizing)

sales amount:

á 1 pc

meets the requirements:

ČSN EN 61537:02

classification:

ČSN 73 0895 P 90-R  
DIN 4102-12 E 90  
STN 92 0205 PS 90

Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

🔥 products approved for standard constructions

🔥 products approved for non-standard constructions

storage:

ČSN EN 60721-3-1

