

item number	for width of cable tray (A) mm	height H mm	B mm	C mm	thickness of metal sheet mm	weight kg/pc	🔥
<b>NIXVT 62_IX</b>	62	14,8	409	238	0,6	0,25	🔥
<b>NIXVT 125_IX</b>	125	14,8	472	300	0,6	0,47	🔥
<b>NIXVT 250_IX</b>	250	14,8	597	426	0,6	1,01	🔥
<b>NIXVT 500_IX</b>	500	14,8	848	676	0,6	2,56	🔥



product description: This cover is used to cove the T-piece NIXT.  
To fix the cover use cover fixtures NIXUV and NIXSM 6X10 bolt.


material: IX - stainless steel AISI 304  
(AISI 316, AISI 316L only to order)

sales amount: á 1 pc

meets the requirements: ČSN EN 61537:02

classification 🔥: ČSN 73 0895 P 90-R  
DIN 4102-12 E 90  
STN 92 0205 PS 90  
Fire classification is depend on the specific conditions of the cable tray, detailed in the catalog Systems with maintained functionality in fire

storage: ČSN EN 60721-3-1

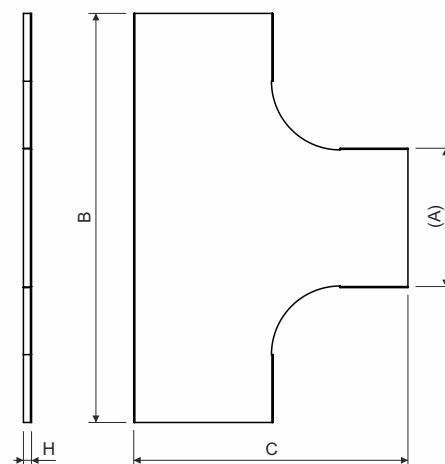

**WARNING****Risk of injury from cutting**

Although the cable trays are produced with maximum effort to minimize sharper edges, it is necessary to wear protective gloves to carry, grip and work with cable elements.

**Electricity injury**

As individual components of cable management systems are made of electrical conductive material, it is essential not to work with a system near live electrical parts. Infringement of the safety regulations may cause serious injury of health or death.

**Safe Use**

Under normal and foreseeable conditions of use, there are no risks to consumers, provided that proper installation and usage are carried out in accordance with the installation manual.

recycling codes:



NIXVT